


# J&J Service and Parts News


October 1998

## Muffler Bracket 8/9hp For Silent Muffler Only

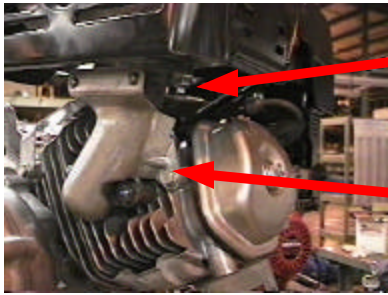


Remove 8mm muffler nut

Remove 6mm shield guard bolt

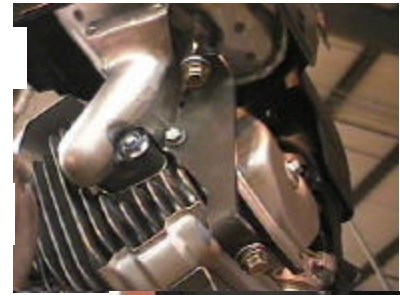


Install 8mm Coupler Nut onto muffler

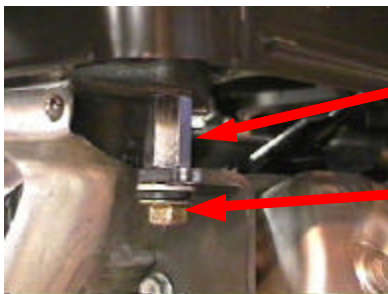

Install Muffler Bracket using 8mm hex bolt, 5/16 lock washer and 1/4 flat washer.



Use the 8mm hex bolt, 5/16 lock washer and 1/4 flat washer to bolt bracket to engine.

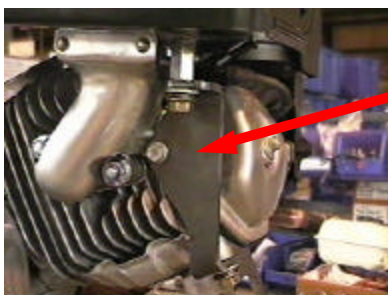

Reinstall 6mm bolt.

Part #	Description	Qty Used	Price
36787530	BRACKET, MUFFLER Silent	(1)	\$8.00
36787540	BRACKET, MUFFLER STD.	(1)	\$8.00
0097113	8MM COUPLER NUT	(1)	\$ .80
0097114	8MM HEX BOLT	(2)	\$ .50
00962	5/16 LOCK WASHER	(2)	\$ .13
00966	1/4 FLAT WASHER	(2)	\$ .17